

LED ADJUSTABLE SURFACE MOUNT LIGHT (DL338B)



Technical Specification

Model	SE-DL338B-85-20W (Adjustable)
Watts	20W
Input Voltage	AC 100~277V
Power Factor	>0.95
Beam Angle	36°
CCT Selection Dip Switch	3CCT: 3000K + 4000K + 5000K
CRI	Ra>90
Lumens Output	1700-1900lm
Size	Ø85*206mm
Dimming	Triac
IP Grade	IP 20
Housing Colour	White / Black




Installation Procedure

WARNING ⚡

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.



Surface mounted installation(With round ceiling plate)

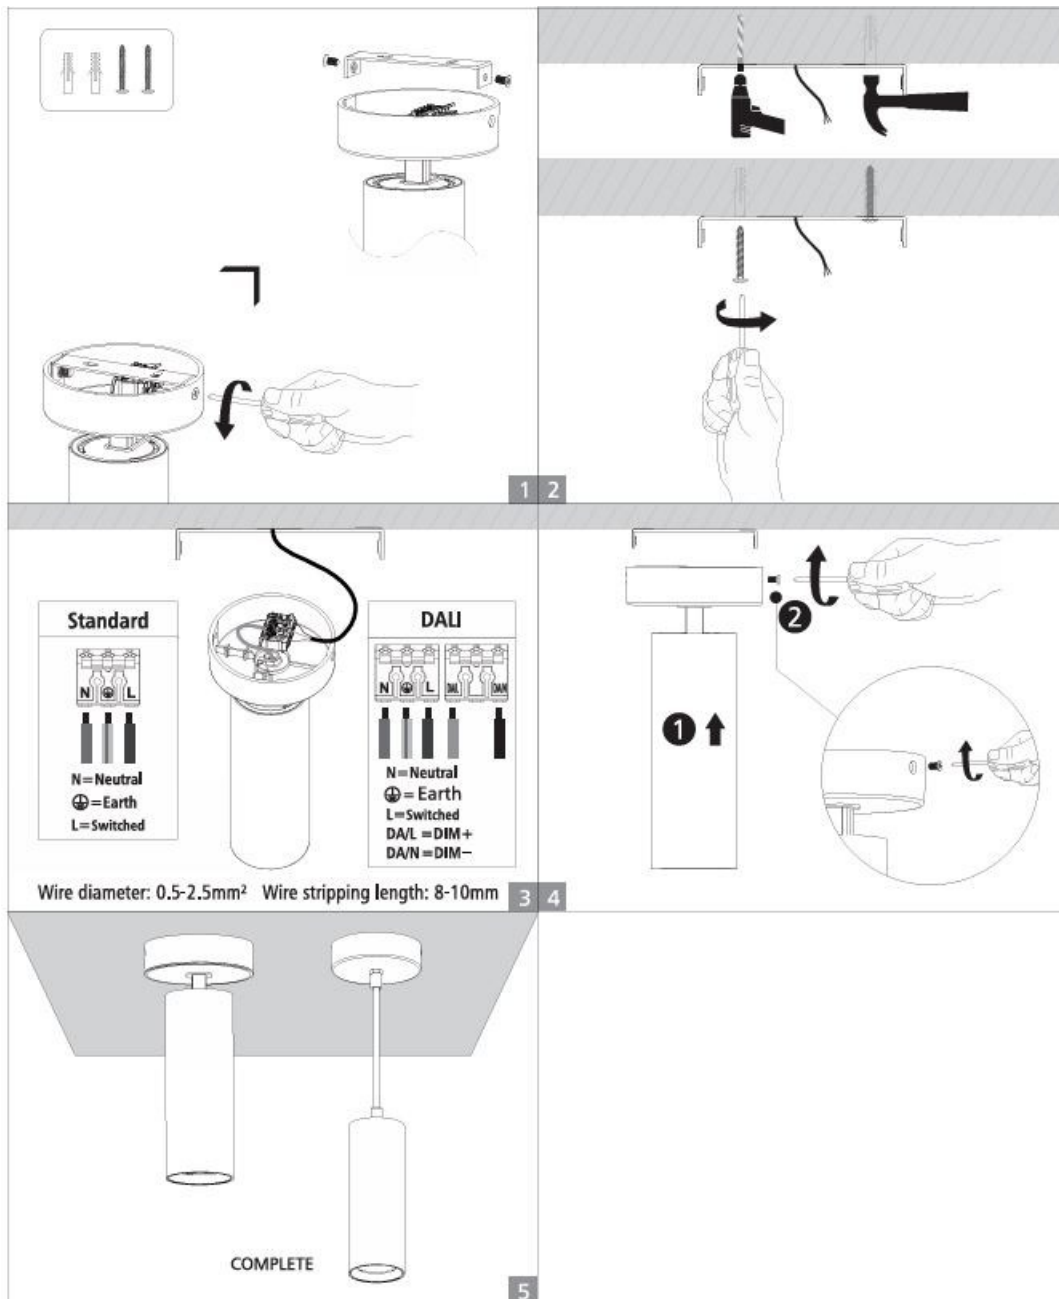

DIY Design

PD338B-55/65/85/100

TL338-55/65/85/100

PD338A-55/65/85/100

DL338B-55/65/85/100

DL338A-55/65/85/100

DL338-55/65/85/100

ACC-PD338B-55/65/85/100

ACC-TL338-55/65/85/100

ACC-PD338A-55/65/85/100

ACC-DL338B-55/65/85/100

ACC-DL338A-65/85/100

ACC-DL338-55/65/85/100

ACC-DL338A-55

Reflector & White/Black/Golden trim 24°/36°/60°



Honeycomb & White/Black/Golden trim
Will affect lighting angle and have 40% lumen decrease

