


IP20 LED DRIVER DC24V 72W

- IP20 Indoor Driver
- Constant Voltage DC 24V
- 1 Set of DC output wires
- Designed for DC24V LED Lights



| Products Model: SE-D72W-024N4 | | |
|-------------------------------|--------------------------|---|
| Output | Rated Output Voltage | 24V |
| | Output current | 3A |
| | Rated Power | 72W |
| | Voltage Precision | 24V±0.5V |
| | Output Ripple | <300mV |
| | Load Regulation | ±2% |
| Input | Input Voltage range | AC 1 0 0~240V |
| | Input Frequency range | 47~63Hz |
| | Power Factor | ≥0.6 |
| | Efficiency | >88% |
| Protection | Overload Protection | <6.5A |
| | Short circuit Protection | Protection type: Hiccup mode, recovers automatically after fault condition is removed |
| Working Protection | Working Temperature | -10~+40℃ (Refer to output load derating curve) |
| | Storage Temperature | -40°C ~ +80°C |
| | IP Rate | IP 20 |
| Safety & EMC | Security Standard | AS/NZS 61558.2.16:2022 AS/NZS1558.1:2018+A1+A2 |
| | Withstand voltage | I/P-O/P: 3 KVAC, I/P-COVER: 2KVAC, O/P-COVER: 500VAC |
| | Insulation Resistance | I/P-O/P:>100M Ohms/500VDC/25°C/70% RH |
| | EMC | EN 55014 EN 61000 |
| Others | Dimensions | 155*53*30(L*W*H) |
| | Weight | 290g |

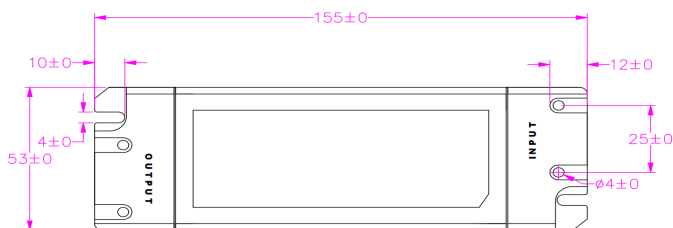

* The information in this datasheet may be changed by Everglow Lighting at any time without prior notice.