




## 25W RGB+ Adjustable 3000K to 6000K COB LED Strip Light

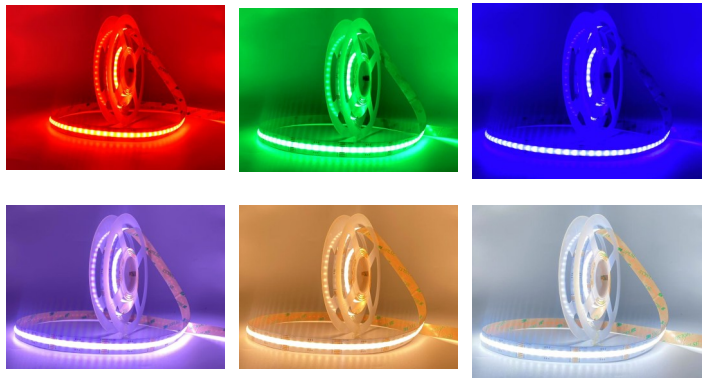


### Technical Specification

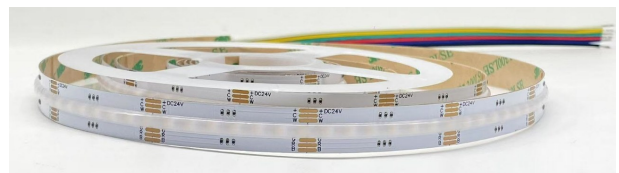







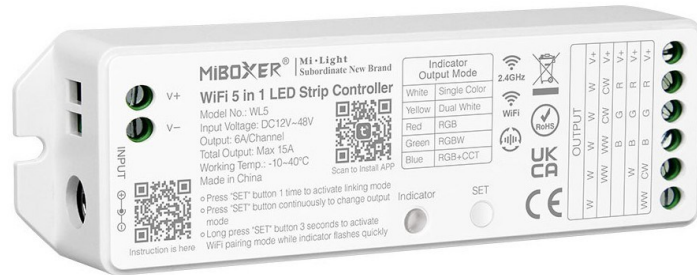










Model	SE-24V-25W-RGBCTA-840-IP20					
Watts	25W					
Input Voltage	DC24V					
LED Chip	840 COB LED CHIPS— RGB & Colour Temperature Adjustable (3000K to 6000K)					
Color Temp.	R	G	B	WW	RGBNW	CW
Lumens Output	162.5lm	332lm	71.5lm	415lm	1225lm	415lm
CRI	Ra>90					
Beam Angle	180°					
Size	5000 * 12*1.8mm					
IP Grade	IP 20					
Operating Temp.	-20° - +45°					
Max Length	5M Per Driver					
Net Weight (kg)	0.23					
Certification	CE&ROHS					



\* The information in this datasheet may be changed by Everglow Lighting at any time without prior notice.

## Compatible with 2.4 RF Remote & 5 in 1 Controller (WiFi + 2.4G)




-  16 Millions of colors to choose
-  Remote control  
Control distance 30m
-  Color temperature adjustable
-  Smartphone app control
-  Dim brightness / Saturation
-  Support third party voice control
-  2.4G RF wireless transmission technology
-  Group contro
-  WiFi wireless control support long-range control
-  Biorhythm
-  Auto-transmitting & Synchronization (only for remote control dimming)
-  Support music rhythm
-  Device sharing
-  Sleep / wake up plan
-  Tap-to-Run & automation
-  Support scene customization
-  Timing setting / countdown turn on / off LED light
-  Do not disturb mode
-  DMX512 controllable (Only for RGB+CCT output mode DMX512 LED transmitter is needed)

# Connect to LED strip diagram




Controller input voltage must be in accordance with the required voltage of LED Strips.


### Connect to Single Color LED strip diagram

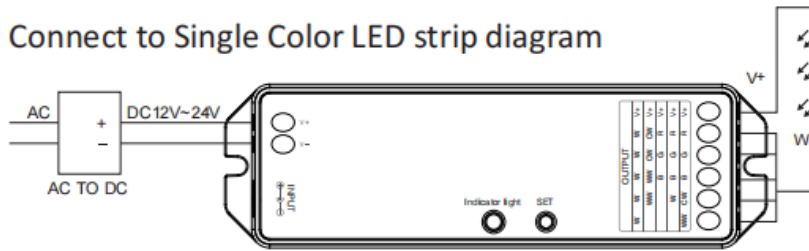


### Connect to Dual White LED strip diagram

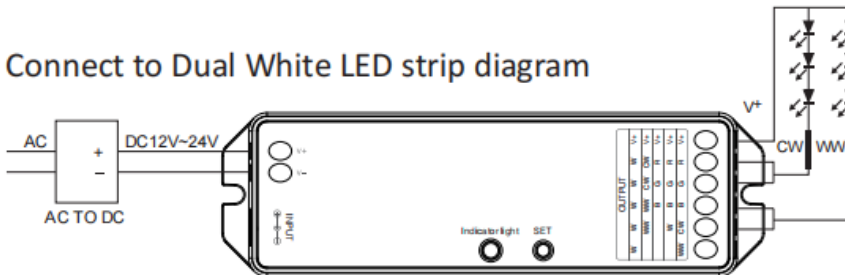


### Connect to RGB LED strip diagram

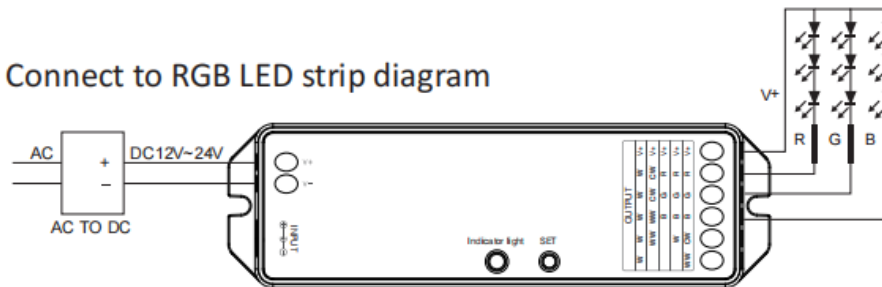

### Connect to RGBW LED strip diagram

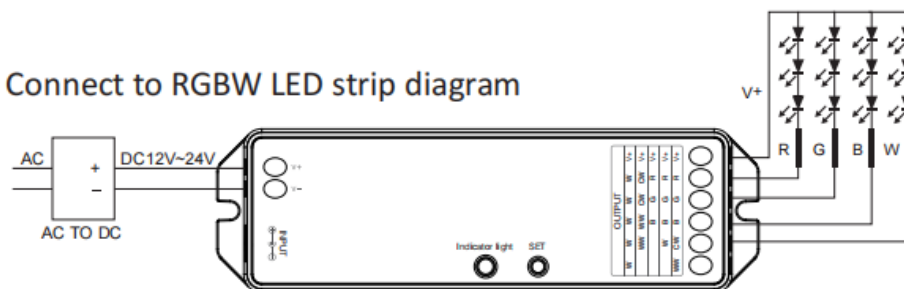

### Connect to RGB+CCT LED strip diagram

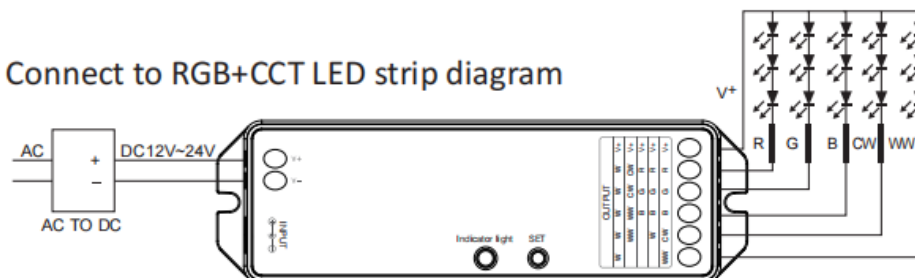



Product Name: 5 in1 LED Controller (WiFi+2.4G)

---

Model No.: HW5

---

Input Voltage: DC12-48V

---

Output: 15A/Channel

---

Total Output: 30A

---

Communication Protocol: WiFi+2.4G

---

WiFi Standard: IEEE 802.11b/g/n 2.4GHz

---

RF: 2.4GHz

---

2.4G RF Control Distance 30m

---

Working Temperature: -10~40°C

---

# Connection Diagram

