

## Technical Specification

Model	SE-MR16-RGBCCT
Watts	4W
Input Voltage	AC 240V 50/60Hz
LED Chip	SMD LED
Tri Colour Temp.	2700K-6500K
Lumens Output	400LM
CRI	Ra>80
Beam Angle	25°
Size	ø50 * H49mm
IP Grade	IP 20
RF	2.4GHz
Control Distance	30m



## Support Smart phone APP control and third party voice control

It need 2.4GHz gateway for smart phone control or third party voice control






## Signal transmitting

One lighting fixture can transmit the signals from the remote control to another lighting fixture within 30m, as long as there is a lighting fixture within 30m, the remote control distance can be limitless.

## Modes synchronization

Different lighting fixture can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

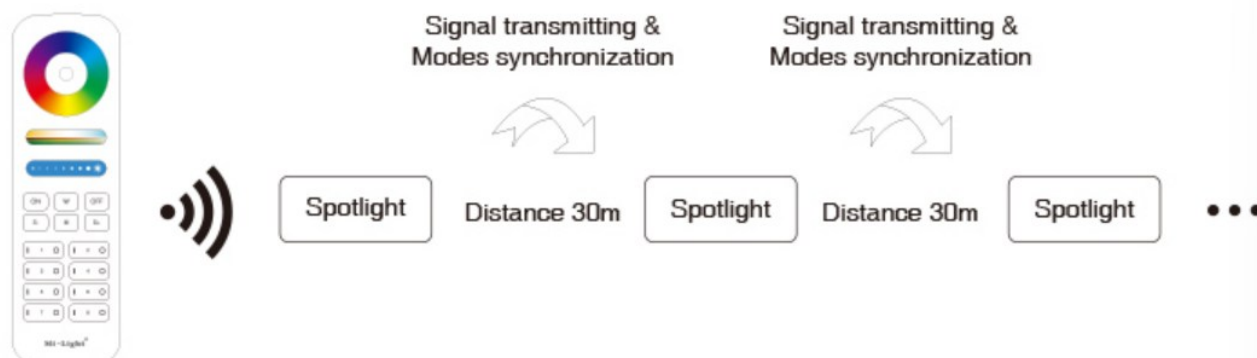




## Acrylic Transmitting Cover

Using imported PC pervious to light cover,  
light transmittance over 90%

## Lamp Body

Flame retardant material,  
long-term heat resistance

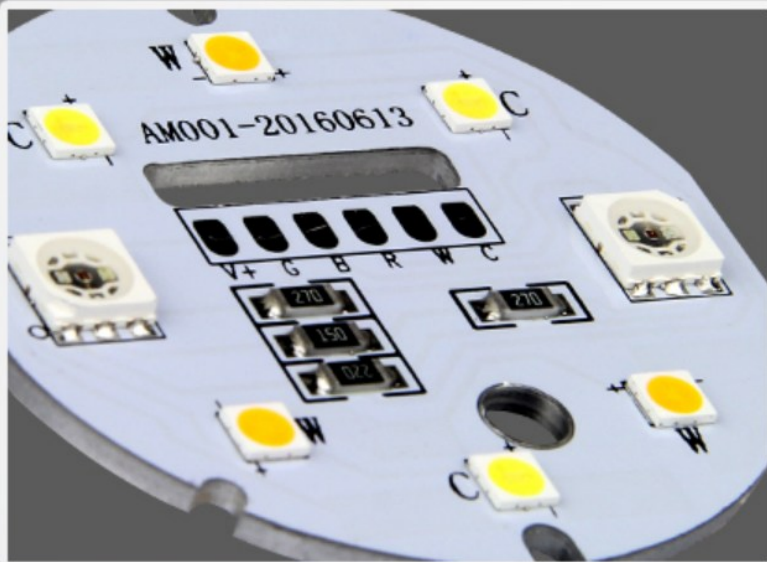

## High Grade LED

Taiwan's high quality lamp bead,  
service life of up to 50000 hours