

DUAL POWER 10/15/20W LOW GLARE LED BATTEN


Product Features

- Quality white powder coat finish with robust polycarbonate diffuser
- Large PA16 terminal block
- East selectable color temperature with an external DIP switch 3000k,4000k,5700k
- High efficiency SMD Led chips, CRI>80
- Integral constant current non-dimmable, flicker free
- Distinct low glare design, UGR<22



Technical Specification

Model	SE-BT24-10/15/20W-TC
Watts	10W—15W- 20W
Input Voltage	AC 200~240V
Dimmable	No, Flicker Free
Power Factor	>=0.95
Beam Angle	75°
Colour Temp.	TRI-3000K/4000K/5700K
CRI	Ra>80
Lumens Output	2400lm±5%@20W 4000K
Size (L*W*H)	583*67*73mm
IP Grade	IP20

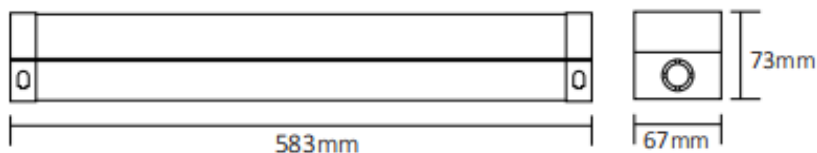

* The information in this datasheet may be changed by Everglow Lighting at any time without prior notice

DUAL POWER 20/30/40W LOW GLARE LED BATTEN

Product Features

- Quality white powder coat finish with robust polycarbonate diffuser
- Large PA16 terminal block
- East selectable color temperature with an external DIP switch 3000k,4000k,5700k
- High efficiency SMD Led chips, CRI>80
- Integral constant current non-dimmable, flicker free
- Distinct low glare design, UGR<22



Technical Specification

Model	SE-BT24-20/30/40W-TC
Watts	20W—30W— 40W
Input Voltage	AC 200~240V
Dimmable	No, Flicker Free
Power Factor	>=0.95
Beam Angle	75°
Colour Temp.	TRI-3000K/4000K/5700K
CRI	Ra>80
Lumens Output	5000lm±5%@40W 4000K
Size (L*W*H)	1183*67*73mm
IP Grade	IP20

