

10W FRAMELESS DOWNLIGHT (DL201)

Product Features

- Frameless Design
- UGR<19, anti glare design with deep reflector
- Made with LM-80 certified LED chip
- Long life-span with low power consumption
- Incl. remote driver and Australian standard plug



Technical Specification

Model	SE-DL201A (Fix)	SE-DL201B (Gimble)
Watts	10W	
Input Voltage	AC 240V 50/60Hz	
Colour Temp.	3000K	
Lumens Output	700LM – 900LM	
CRI	Ra>80	
Beam Angle	36°	
Size	Ø 85*81 mm	
Cutout	Ø 75mm	
IP Grade	IP 40	
Dimmable	Yes (Triac Dimming)	
Housing Colour	White	



* The information in this datasheet may be changed by Everglow Lighting at any time without prior notice.



DL201
A-2.5



DL201B-
2.5

1: Deep baffle design, anti-glare

2: DL201B-2.5 inch, adjustable angle

Installation Procedure

WARNING



1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.




Turn Off
Power Supply

Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.


How to install

Step 1

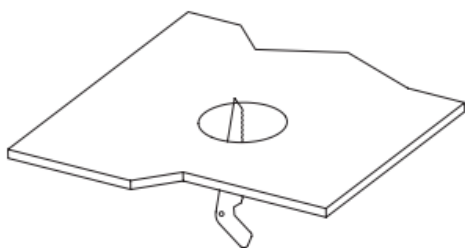


Open a hole according to the cutout size of led downlight.

Step 2




Use screw-driver to open the driver terminal cover, feed the main AC wire L N. in terminal block respectively, then fix the cover back.

Step 3

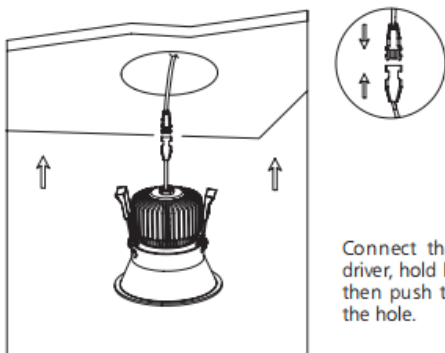

Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.

Step 4

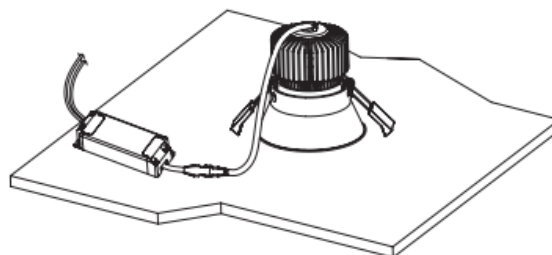

Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.