



6W COB LED Strip Light 160chips/m

Technical Specification

Model	SE-12V/24V-6W-160-IP65
Watts	6W/m
Input Voltage	DC12
LED Chip	160 Chips*COB
Color Temp.	3000K
Lumens Output	100lm/W
CRI	RA>90
Beam Angle	180°
Size	5000 * 08*1.0mm
IP Grade	IP65 (Heat-shrinkable tube)
Operating Temp.	-20° - +45°
Max Length	5M-12V Driver
Net Weight (kg)	0.12/roll with bag
Certification	CE&ROHS&ETL

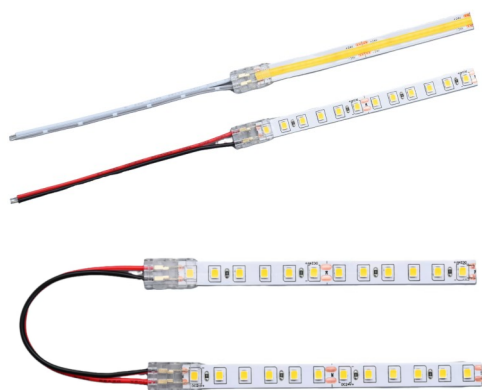

8mm

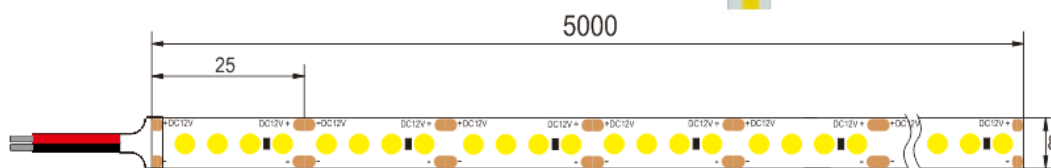

160LEDs/m 8mm DC12V cob

* The information in this datasheet may be changed by Everglow Lighting at any time without prior notice.


RF Wireless Remote

LED Dimmer

Instructions

- For LED Strip/Module
- Card Type RF Remote
- 64-level Dimmer
- Ultra Slim Design
- 8 Shortcut Brightness
- Smooth Dimmer Effect
- 5-24V Wide Voltage
- Easy Remote Pairing
- High Out Current
- Power off Memorize

Functions

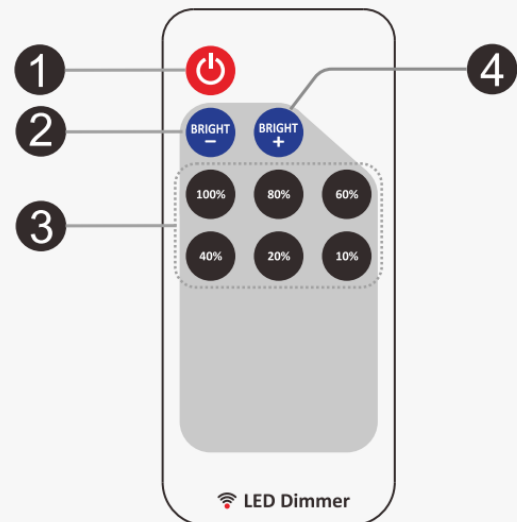

1. Turn On/ Standby

Press this key to turn on unit or switch to standby mode. At power on, unit will automatically turn on and restore to previous status .

2/4. Brightness Adjust

Adjust LED brightness Press BRIGHT+ to increase brightness and press BRIGHT- to decrease brightness.

3. Brightness Shortcuts

Directly switch to 100%, 80%, 60%, 40%, 20% or 10% of full brightness.

Installing

1. Power Supply

This unit accepts DC 5V to 24V power supply. The red cable (or inner pole of DC jack) should be connected to positive and black cable (or sleeve pole of DC jack) to negative. Please make sure the power supply voltage is same as the LED load.

2. LED Output

The red cable (or inner pole of DC plug) should be connected to LED positive and black cable (or sleeve pole of DC plug) to negative.

The peak output current is 12 amperes and maximum constant current is 6 amperes, please reduce load if main unit is overheating.

CAUTION! Do not short circuit or overload the LED outputs, this may lead to permanent damage!



Operation

1. Using Remote Controller

Please pull out the battery insulate tape before using. The RF wireless remote signal can pass through barrier, so it's not necessary to aim at the main unit when operate.

For proper receiving remote signal, please do not install the main unit in closed metal parts.

2. Pairing New Remote

The remote and main unit is 1 to 1 paired as default. Furthermore, main unit can be paired to 3 remote controllers and each remote controller can be paired to any main unit.

Please do following steps to pair new remote controller:

- 1). Plug off the power of main unit and plug in after 5 seconds.
- 2). Press '100%' and '60%' key together in 5 seconds after power on.

After this operation, the main unit will recognize the new remote controller.

3. Free Remote Pairing Mode

In some specific cases, the main unit may need to be paired to any remote controllers. Please do following steps for free remote pairing mode:

- 1). Plug off the power of main unit and plug in after 5 seconds.
- 2). Press 'ON/OFF' and 'BRIGHT+' key together in 5 seconds after power on.

After this operation, the main unit will recognize any remote controller. To pair the main unit back to specific remote, please repeat the 'Pairing New Remote' operation.

Specification

Lighting brightness level	64 levels
Brightness Shortcut	6 shortcuts
Smooth dimmer effect	Yes
Working voltage	DC 5~24V
Output current	peak 12A, constant 6A
Remote controll mode	RF Wireless
Remote frequency	433.92MHz
Remote distance	>15m at open area